


First Team Sports, Inc.

Teammate Fixed Player Bench

General Assembly & Installation Instructions

Diagram A

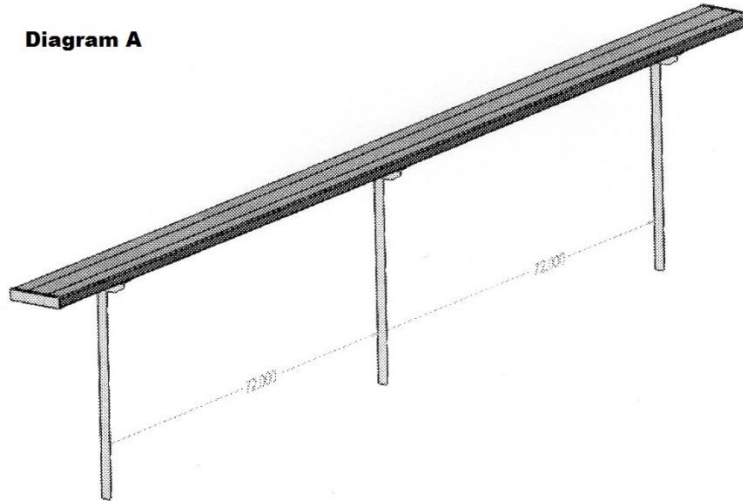

PLEASE NOTE: This assembly diagram is for general reference purposes only. Your bench configuration may differ from the one shown above.

1. Lay seat plank face down on a working tabletop surface
2. Using the pressure clamps, 3/8"x2" carriage bolts and hardware provided, loosely secure each leg to the seat plank as shown in diagrams A and B.
3. Space legs appropriately. Legs should be spaced on 72" centers with approx. 18" of seat plank outside the outermost legs. (The number of legs you receive will be based on the length of your bench)
4. Be sure pressure clamps are positioned properly and tighten. PROPER PRESSURE CLAMP POSITIONING IS CRUCIAL TO THE OVERALL STRENGTH OF THE ASSEMBLY. MAKE SURE PRESSURE CLAMPS ARE CENTERED AND SQUARE, AS IN THE ILLUSTRATION IN DIAGRAM B.
5. When all bench legs are spaced properly and secured adequately, it is time to determine proper location for installing the bench.
6. When bench location has been determined, mark the location of each bench leg and dig a 20" deep hole at each spot. Each hole should be a minimum of 6"-8" in diameter.

7. Fill each hole with concrete and insert bench legs into footing holes.
8. Brace bench so bench is sitting straight and plumb with seat plank approximately 17" above ground level.
9. Let concrete cure for a minimum of 7 days before use.

FIRST TEAM SPORTS, INC
SEATPLANK ATTACHMENT DIAGRAM

DIAGRAM B

